


サイズ表

C-Dタイプ スチール製：溶融亜鉛めっき(ドブめっき) 芯棒：シルバービック処理

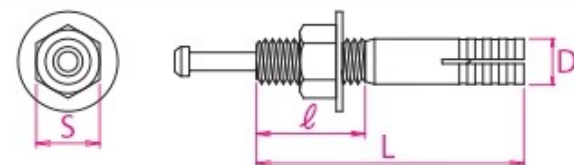

単位：mm										単位：本		単位：円	
ねじの呼び (外径 D)	品 番	全長 L	ねじ長さ ℓ	最 大 取付物厚	穿孔径	アンカー 埋込み長さ	穿孔深さ	ナット 二面幅 S	入数		標準価格 (税抜き)		
									小箱	大箱			
M 8	 C- 850D	50	20	5	8.5	35	43 以上	13	50	800	152		
	 C- 870D	70	25	25						185			
M10	C-1050D	50	20	6	10.5	30	40 以上	17		400	187		
	 C-1060D	60	25			40	50 以上			300	200		
	 C-1080D	80		26	240								
	 C-1090D	90	30	36	295								
	 C-1010D	100		46	330								
	 C-1012D	120		66	200	385							
M12	C-1260D	60	20	6	12.7	40	52 以上	19		30	240	308	
	 C-1270D	70	25			50	62 以上		180		335		
	 C-1290D	90	30	26	403								
	 C-1210D	100	40	36	465								
	 C-1212D	120	50	56	120	540							
	M16	 C-1610D	100	40	20	17.0	60	76 以上	24	15	90	730	
 C-1612D		120	40		865								
 C-1615D		150	50	70	60						1,150		
M20	 C-2013D	130	50	25	21.5	80	100 以上	30	10	40	1,400		
	 C-2015D	150		45						1,760			
	 C-2019D	190		85						1,890			

- ・ナット/ワッシャー仕様
- ・最大取付物厚=全長-埋込長さ-(ナット/ワッシャー)