


本体打込み式



また、鉄筋コンクリート用異形棒鋼と併用した差筋アンカーとしても使用が可能であり、バリエーション豊かな製品です。

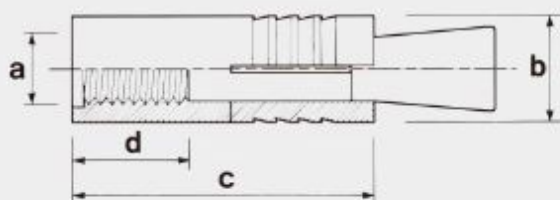

■寸法及び強度

●試験用ボルト=SUS400 相当品

品番	ねじの呼び a	外径 (mm) b	全長 (mm) c	ねじの長さ (mm) d	ねじのはめあい長さ (mm)	ドリル径 (mm)	コンクリート部 穿孔深さ (mm)	専用 打込み棒 (品番)	使用手 ハンマー (kg)	※1最大強度		※2長期許容強度		質量/1本 (g)	梱包単位(本)	
										引張(KN)	せん断(KN)	引張(KN)	せん断(KN)		小箱	大箱
# 6CA	M6	10.5	30	9	8	11.0	33	SC-6	0.9	11.7	8.2	1.25	1.50	19	100	1200
# 8CA	M8	12.0	35	12	10	12.5	38	SC-8	0.9	16.4	14.0	1.69	2.73	24	50	600
#10CA	M10	14.0	40	14	12	14.5	45	SC-10	1.3	21.7	19.0	2.23	4.33	40	100	600
#12CA※3	M12	17.5	50	20	16	18.0	56	SC-12	1.3	29.5	25.6	3.48	6.30	75	50	300
#16CA※3	M16	21.4	60	24	20	22.0	69	SC-16	1.8	46.6	46.5	5.04	11.73	132	30	180
#20CA	M20	25.4	83	31	25	26.0	93	SC-20	1.8	62.5	76.2	9.29	18.31	234	15	90
#22CA	M22	28.5	93	36	30	29.0	103	SC-22	1.8	79.3	79.2	11.67	22.64	319	10	60
#24CA	M24	31.8	110	55	36	33.0	120	SC-24	2.7	83.5	105.8	16.11	26.38	469	6	36
#28CA	W1/4	10.5	30	9	8	11.0	33	SC-6	0.9	11.2	6.5	1.25	1.49	19	100	1200
#258CA	W5/16	12.0	35	12	10	12.5	38	SC-8	0.9	17.3	11.8	1.69	2.47	24	50	600
#38CA	W3/8	14.0	40	14	12	14.5	45	SC-10	1.3	21.0	15.8	2.23	3.67	40	100	600
#48CA	W1/2	17.5	50	20	16	18.0	56	SC-12	1.3	30.5	26.3	3.48	6.53	72	50	300
#58CA	W5/8	21.4	60	24	20	22.0	69	SC-16	1.8	44.9	44.8	5.04	10.75	132	30	180
#68CA	W3/4	25.4	83	31	25	26.0	93	SC-20	1.8	63.1	68.9	9.29	15.94	244	15	90
#78CA	W7/8	28.5	93	36	30	29.0	103	SC-22	1.8	75.1	92.4	11.67	22.02	316	10	60
#88CA★	W1	31.8	110	55	36	33.0	120	SC-24	2.7	68.0	109.0	16.11	28.92	450	6	36

※3 #12CA全長52mm、#16CA全長63mmは受注生産になります。

■ 施工手順

