


図面／規格
【アイナット】

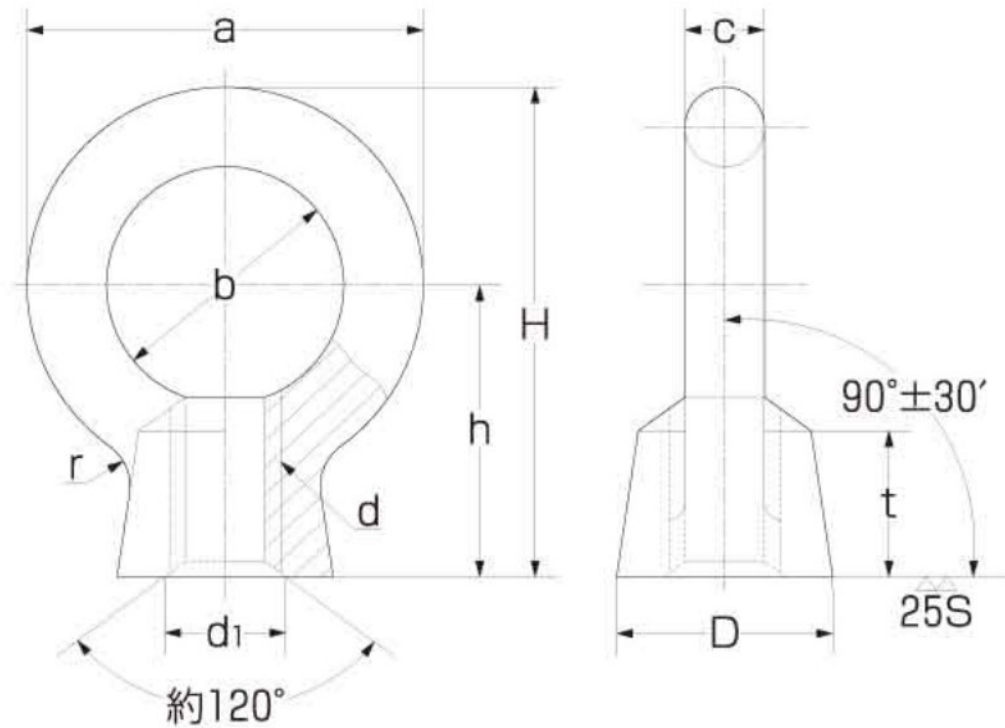


ねじの 呼び d	a	b	c	D	t	h	H (参考)	r (約)	d1
M6	26	16	5	13	10	19※1	32.5	6	8
M8	32.6	20	6.3	16	12	23	39.3	8	8.5
M10	41	25	8	20	15	28	48.5	10	10.6
M12	50	30	10	25	19	36	61	12	12.5
M14	60	35	12.5	30	23	42	72	14	17
M16	60	35	12.5	30	23	42	72	14	17
M18	72	40	16	35	28	50	86	16	21.2
M20	72	40	16	35	28	50	86	16	21.2
M22	81	45※2	18※3	40※4	33	58	98.5	20	23
M24	90	50	20	45	38	66	111	25	25
M27	110	60	25	60	46	80	135	30	31.5
M30	110	60	25	60	46	80	135	30	31.5
M33	110	60	25	60	46	80	135	30	31.5
M36	133	70	31.5	70	55	95	161.5※5	35	37.5
M42	151	80	35.5	80	64	109	184.5※6	40	45
M48	170	90	40	90	73	123	208	45	50
M64	210	110	50	110	90	151	256	50	67

※印の商品は材質が SUS / SUS304 / SUS316L の場合、下記寸法になります。

※1 "20" ※2 "44" ※3 "19" ※4 "41" ※5 "162" ※6 "185"

図面／規格
【アイナット（ウィット）】

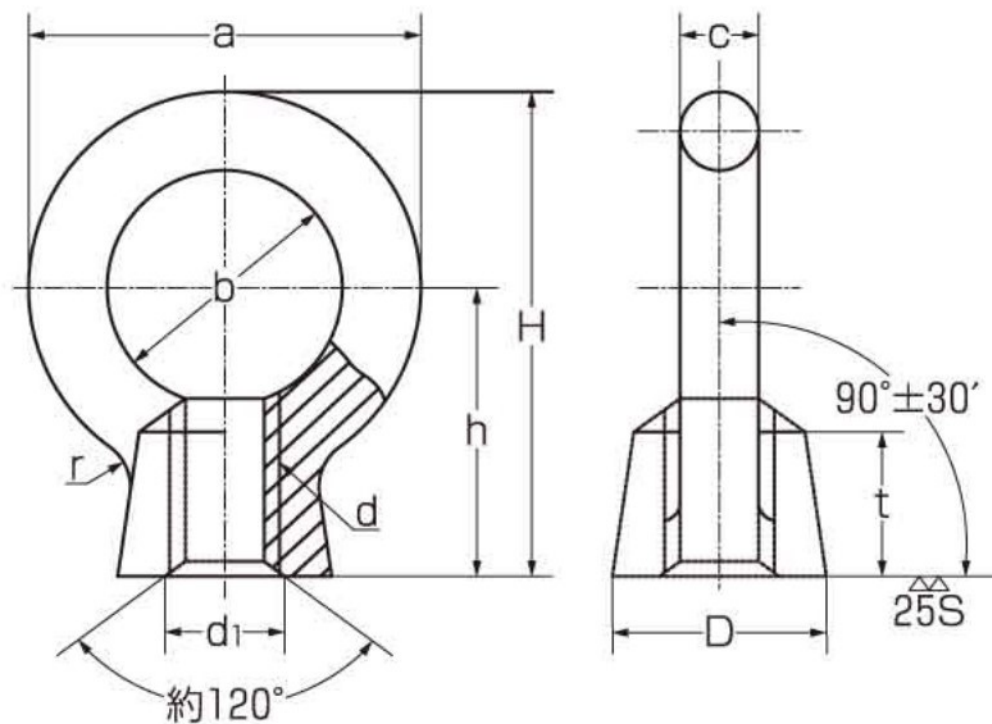

鉄

ねじの 呼び d	ねじ山 ／ インチ	a	b	c	D	t	h	H
W 1/4	20	26	16	5	13	10	19	32.5
W 5/16	18	32.6	20	6.3	16	12	23	39.3
W 3/8	16	41	25	8	20	15	28	48.5
W 1/2	12	50	30	10	25	19	36	61
W 5/8	11	60	35	12.5	30	23	42	72
W 3/4	10	72	40	16	35	28	50	86
1"	8	90	50	20	45	38	66	111
1"-1/4	7	110	60	25	60	46	80	135
1"-1/2	6	133	70	31.5	70	55	95	161.5

ステンレス

ねじの 呼び d	ねじ山 ／ インチ	a	b	c	D	t	h	H
W1/4	20	26	16	5	13	10	20	32.5
W5/16	18	32.6	20	6.3	16	12	23	39.3
W3/8	16	41	25	8	20	15	28	48.5
W1/2	12	50	30	10	25	19	36	61
W5/8	11	60	35	12.5	30	23	42	72
W3/4	10	72	40	16	35	28	50	86
1"	8	90	50	20	45	38	66	111