



図面／規格
【六角ナット（１種鉄M２５以上黒皮）】

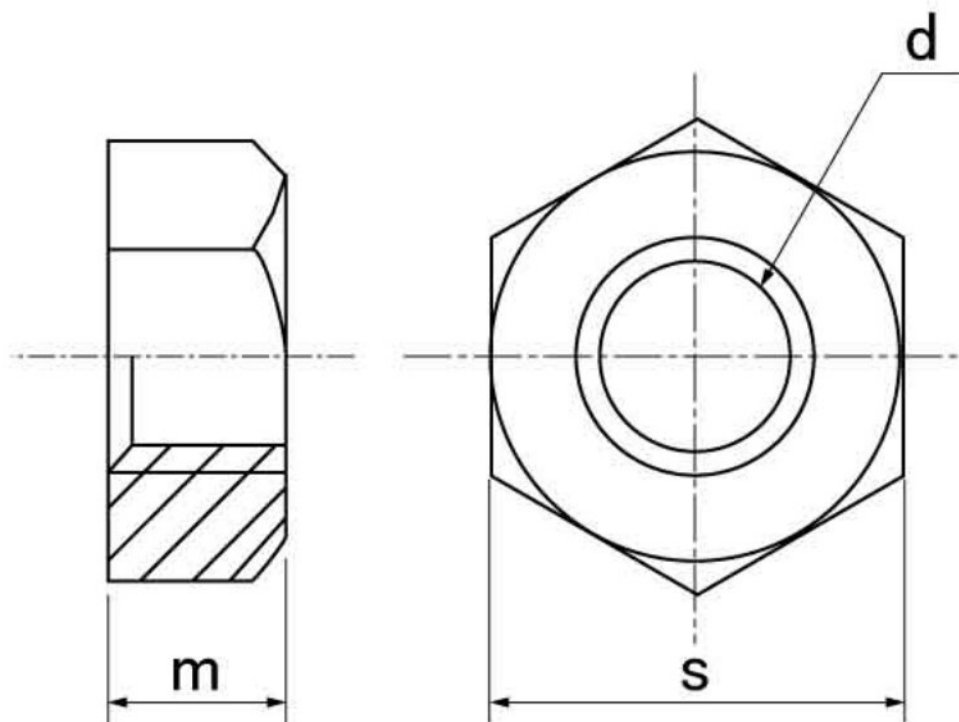

呼び	基準 寸法	m 許容差			基準 寸法	s 許容差	
		上	中	並		上	中・並
M2	1.6				4		
M2.3	1.8				4.5		
M2.5	2	0			5		
M2.6	2	-0.25			5		
M3	2.4		-	-	5.5	0	-
M3.5	2.8				6	-0.2	
M4	3.2				7		
M4.5	3.6				8		
M5	4	0			8		
M6	5	-0.30			10		-0.6
M7	5.5		-0.48	± 0.6	11		
M8	6.5				13	0	0
M10	8	0	0	± 0.8	17	-0.25	-0.7
M12	10	-0.36	-0.58		19		
M14	11				22	0	0
M16	13	0	0	± 0.9	24	-0.35	-0.8
M18	15	-0.43	-0.70		27		

呼び	基準 寸法	m 許容差			基準 寸法	s 許容差	
		上	中	並		上	中・並
M20	16	0	0	± 0.9	30	-0.35	-0.8
M22	18	-0.43	-0.70		32		
M24	19				36	0	0
M27	22				41	-0.4	-1.0
M30	24	0	0	± 1.0	46		
M33	26	-0.52	-0.84		50		
M36	29				55		
M39	31				60		
M42	34				65	0	0
M45	36				70	-0.45	-1.2
M48	38	0	0	± 1.2	75		
M52	42	-0.62	-1.0		80		
M56	45				85		
M60	48				90	0	0
M64	51	0	0	± 1.5	95	-0.55	-1.4
M68	54	-0.74	-1.2		100		

図面／規格
【六角ナット（３種）】

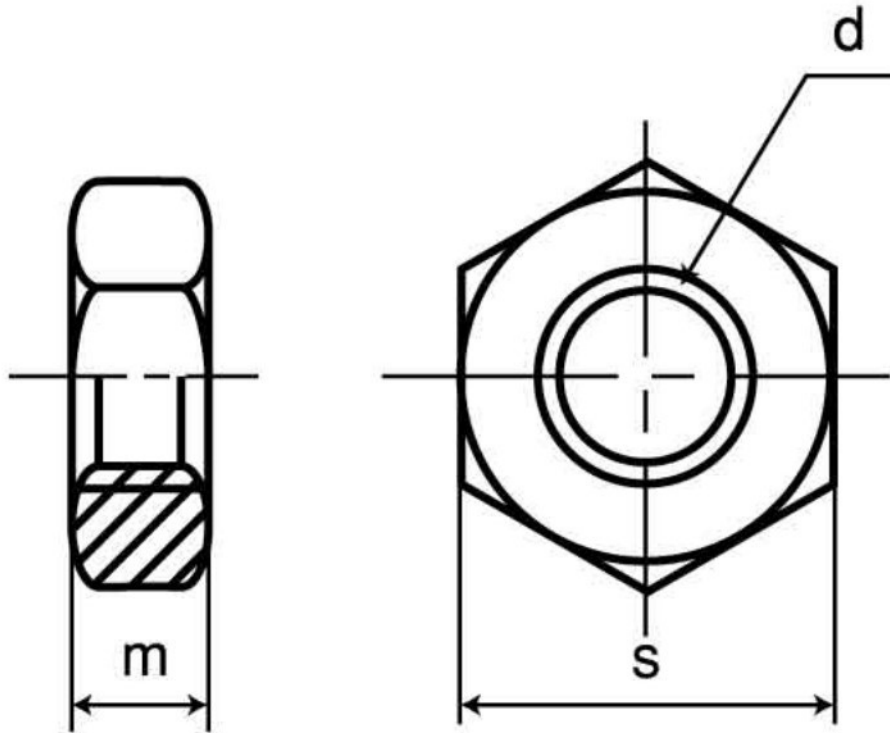

呼び	m				s			
	基準 寸法	許容差			基準 寸法	許容差		
		上	中	並		上	中・並	
M2	1.2	0 -0.25	-	-	4	0 -0.2	-	
M2.3	1.4				4.5			
M2.5	1.6				5			
M2.6	1.6				5			
M3	1.8				5.5			
M3.5	2	0 -0.3	0 -0.48	± 0.6	6	0 -0.25	0 -0.7	
M4	2.4				7			
M4.5	2.8				8			
M5	3.2				8			
M6	3.6				10			
M7	4.2	0 -0.36	0 -0.58	± 0.8	11	0 -0.35	0 -0.8	
M8	5				13			
M10	6				17			
M12	7				19			
M14	8				22			
M16	10	-0.43	-0.7	± 0.9	24			
M18	11				27			

呼び	基準 寸法	m			s		
		許容差			基準 寸法	許容差	
		上	中	並		上	中・並
M20	12	0 -0.43	0 -0.70	± 0.9	30	-0.35	-0.8
M22	13				32	0 -0.4	0 -1.0
M24	14				36		
M27	16				41		
M30	18				46	0 -0.45	0 -1.2
M33	20	0 -0.52	0 -0.84	± 1.0	50		
M36	21				55		
M39	23				60		
M42	25				65		
M45	27	0 -0.62	0 -1.0	± 1.2	70	0 -0.55	0 -1.4
M48	29				75		
M52	31				80		
M56	34				85		
M60	36				90		
M64	38				95		
M68	40				100		